

SPECIFICS OF VISCOUS OIL PRODUCTION USING A DRAIN-HOLE WELL


I. V. Chizhov

Key words: permafrost rocks area; production of high viscosity oil; injection of displacing heat-transfer agent

40 %
[1].

1 (1 2) [9].
 (2): 1 — , 3 —
 , 4 — , 6 —
 5 — , 7 — ; 8 —
 , 9 — ; 10 —

7, 10,
 1 2 3,
 1 7
 1 2 3 8.
 4, 5, 6. 5 6
 4

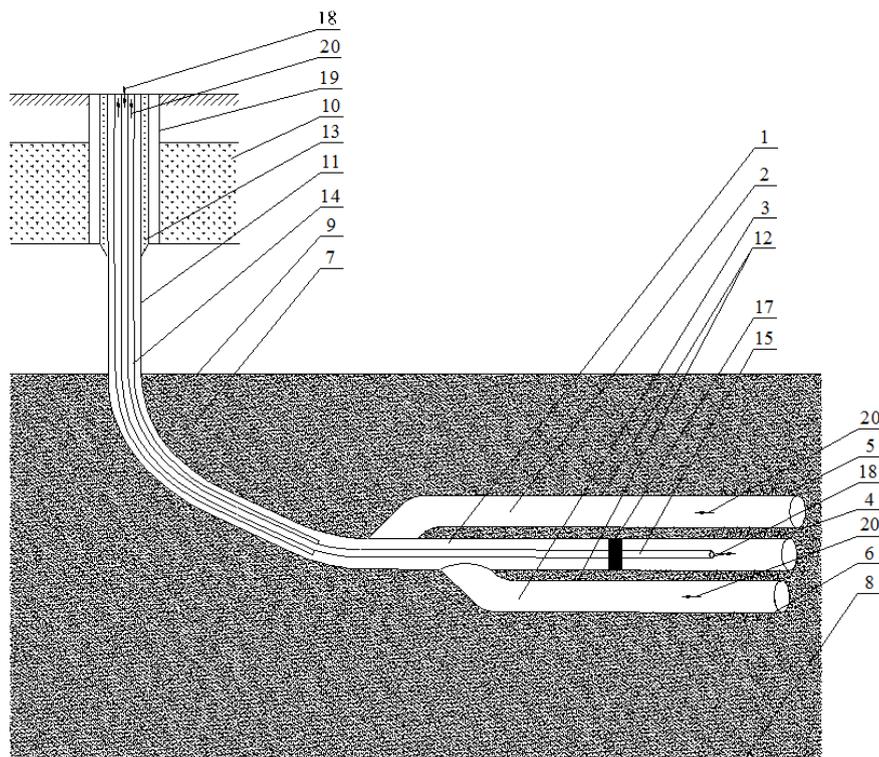


.1.

()

.2

().

.2.
()

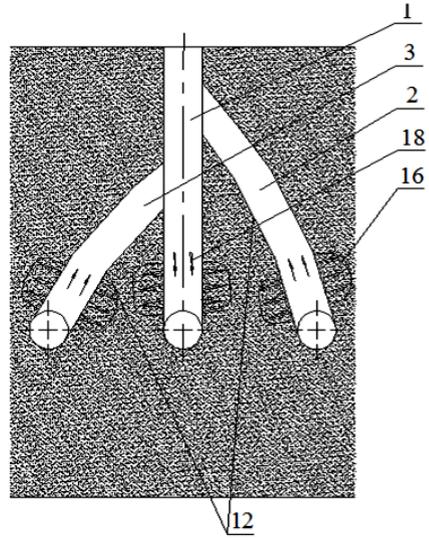

9 , 9 7 11. -
 9 , 11 (. 11.),
 12 12 (. 2 3. 11
 - 11 (.).
 11 13 -
 ,
 ,
 14 11 -
 3, — 7 - 15 1 2 -
 , 16,
 2 3 1 -
 - 15, 1 -
 17, 11 1 -
 , 18 - 15
 16, 4 1 1
 5 6 2 3 2 , 3 -
 12 2 3 14, -
 14, 11, -
 19, 20.

1. , 2008. – . 67-89.
2. // – 2012. – 5. – . 268-271.
3. : « », 2004. – 336 .
4. // – 1995. – 8. – . 54-59.
5. // – 2012. – 5. – . 28-30.
6. 2439308 . 21 43/24. / ().- 2010123970, . 11.06.10; . 10.02.12, . 1.
7. 2366805 . 21 43/16, 43/26. / ().- 2008101011, . 09.01.08; . 10.09.09, . 25.
8. 101082 . 21 43/16. / ().- 2010135540, . 24.08.10; . 10.01.11, . 11.
9. 159252 . / (.- 2015102486, . 26.01.15; . 10.02.16, . 4.

Information about the authors

Chizhov I. V., postgraduate of Industrial University of Tyumen, phone: 8(3452)286409